

# GRAINKING

# NYREX

2026 MY

## Nyrex Chaser BIN



2026 75T Nyrex Chaser Bin



40,000L Lineup

## Meet GrainKing's Nyrex Chaser Bin

**The most efficient grain handling equipment on the market.**

Designed, Engineered and Manufactured by GrainKing, Nyrex Chaser bins have been the Aussie farmer's first choice for over 40 years. Beginning in 1962 and solely manufacturing grain bins since 1981, GrainKing has decades of experience in creating the safest, most efficient and durable Chaser bins on the market. From hydraulic steering to internal walkways, everything is included after years of talking to farmers, implementing their advice and understanding their needs.

**BACKING  
EVERY  
HARVEST**

# Speed and Efficiency

A standard large Auger paired with electronic flow doors and PTO/Hydro options make the Nyrex one of the fastest bins in the field with the most operator control

## Larger Auger

A 22" standard Auger and 20" floor Auger on our smaller, narrow range of Nyrex Chaser bins. For maximum unload speed we have a larger 24" Auger on our 45T, 55T, 65T and 75T Chaser Bins with an upsized 22" floor Auger.

## Electronic Flow Doors

Full length electronic grain flow doors allow for ultimate control and grain flow.

## PTO/PTO and HYD/HYD

Looking for further speed and efficiency? Order your Nyrex with our **full PTO/PTO drive** option for maximum unload speed. Our **full Hydro option** has a slower discharge rate but allows for greater control over unload speed or if your machine does not have PTO.



75T full PTO Unload



Grain Flow Doors



Unload



2026 Windows

# Our Most Feature Packed Bin Yet

## An superb range of features for a superb bin

The latest version of our GrainKing Chaser Bins, the Nyrex, is jam packed full of features to make our bins more practical, safe and efficient. A **hydraulic floating cushioned drawbar**, **hydraulic swinging vertical lift jack**, a **hand driven roll tarp** keeps your grain safe, **swinging full length cleanout doors** and a **standard Overrun clutch** for your discharge Auger saves wear and tear on your equipment. Go all out and add an **electronic clutch** for quick PTO shutoff to prevent damage if your discharge auger jams and avoid overspill when topping off trucks etc.

2026 models include a **sample chute**, **toolbox**, **full height rear ladder**, **adjustable discharge Auger** height and reach, **single set of hoses** to plug in to your tractor on full PTO drive, **3 x cameras** on the **adjustable spout** and a button on your drawbar to control the jackstand from outside the cab.



Hydraulic Hose Holder



Hydraulic Jackstand

### Unload with Ease

A now pivoting height adjustable auger with range from 3.5m to 5.95m discharge height for clearance, adjustable poly spout for control, a camera with a light on the spout for night unloading and left or right hand discharge side to choose from.



### Brakes and Safety

Every GrainKing Nyrex is manufactured with brakes as standard. Lights and 3 x cameras, oversize signs, tail lights and flashing beacons are all standard Nyrex safety gear.



### Easy Maintenance

Nyrex's maintenance is quicker than ever with minimal grease points and greaseless bushings/bearings used in critical locations. A folding side or rear access door and internal walkways enables safe and efficient cleanout.




# Improved Ride and Undercarriage

## Steering axles and hydraulic suspension

New and improved suspension on 2026 GrainKing Chaser Bins have increased suspension travel **up to 400mm total**. Additionally, our **reinforced floating cushioned drawbar** ensures a steady ride and height adjustment for the perfect ride. Tandem and tri axle models have **load sharing independent suspension** as standard. Tandem models have **rear steering axles** and Tri models are kitted with **front + rear steering axles** to increase turning circle while minimising soil disturbance and compaction.

2026 Models now include a **pivoting discharge auger**, allowing the operator to fill low load in hoppers or reach into the highest Motherbins on the market. Augers are dynamically balanced at speed and up to 10mm **thick continuous auger flighting's** further enhances durability, giving a longer lifespan and less maintenance over each bin. The hitch now **rests and pivots** on the ball for a much smoother ride.

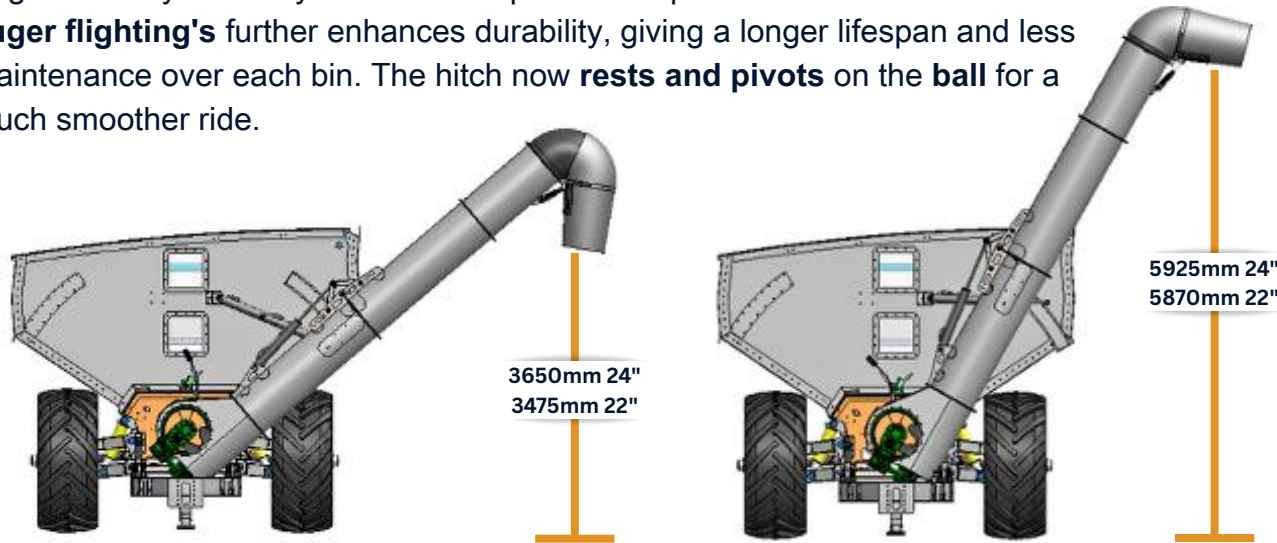

**5 YEAR STRUCTURAL WARRANTY!**



# Easy and Efficient Cleanout

Swinging cleanout doors, access doors and zero clutter internal design




Swinging Cleanout Doors

## We've made cleanup a satisfying experience

GrainKing's chaser bin cleanout has never been easier or more efficient, thanks to innovative design features implemented after gathering valuable customer feedback over the years.

The **swinging cleanout doors** provide quick grain removal with **one handle opening every door**. **low crossbars** ensure safe and convenient movement inside the bin. Additionally, the **rear entry door** makes it simple to access the inside of the bin. A **full height rear ladder** is **now standard** as a second access point for when the bin is full. **Internal walkways** Included for ease of cleanout and walking around inside the bin.

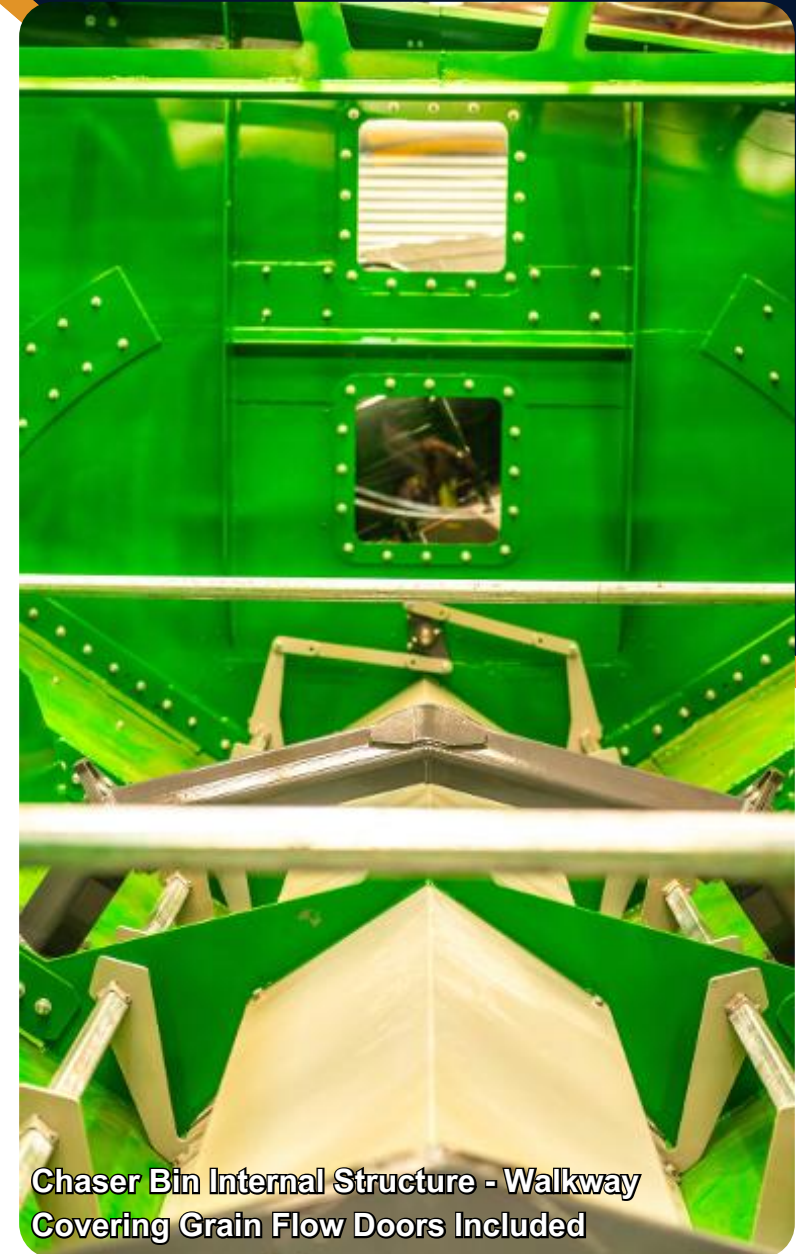


Chaser Bin Internal Structure - Walkway  
Covering Grain Flow Doors Included

# Full PTO Drive Gearbox

No chains, no belts, minimal maintenance.  
Just gears and oil.




Full PTO Gearbox

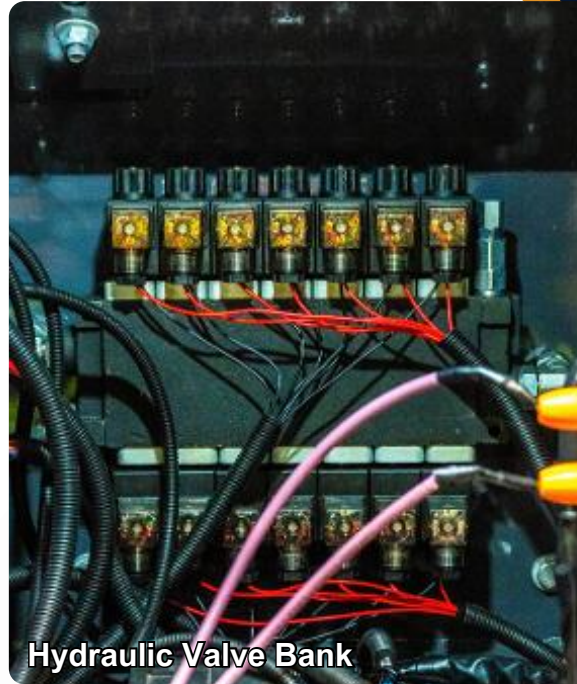

Hydraulic Valve Bank

Full PTO Gearbox Drive Render

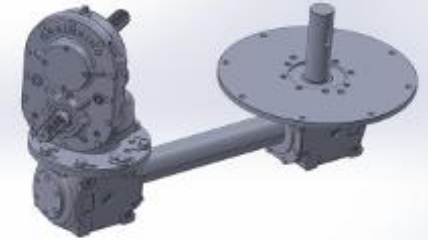

Toolbox

## Simple, Efficient and Fast Unload

GrainKing's new and improved **full PTO drive gearbox** eliminates not only all hydraulics to drive the augers, but all belts and chains as well. Through a series of gears the discharge auger is run directly off the PTO at the same time as the floor auger. This means that all 1000 PTO tractors will get **maximum discharge** speed regardless of **oil flow**. Use your internal grain flow doors to control the speed of grain into the augers. **The optional electronic clutch** allows you to disengage the floor auger, the **red light** indicates when the clutch is on. When setup on our standard 22" auger you can expect to get up to 18T a minute in the right conditions, pair it with a 24" auger on our 45T - 75T bins and you'll have over 20T a minute pouring out the end of your spout. All electronics and hydraulics are inside the toolbox on the side of the bin.

**All hydraulics** are then run through an **electronic valve bank** which is controlled via a handpiece. Only **1 set of hydraulic hoses** (and a brake hose) is then needed to plug into your tractor to operate the whole bin.



Hose and PTO Holder

# Adjustable Suspension

Updated suspension and hydraulics make the 2026 GrainKing Nyrex the best Chaser bin on the market



Hydraulic Cushioned Drawbar

## Suspension

GrainKing's new and improved closed loop **hydraulic suspension** and **hydraulic cushioned drawbar** ensures a smooth, reactive ride that will soak up every bump and rut in the field **massively reducing compaction** and **soil disturbance**. The closed loop means that each mount is **independent** and moves up and down on it's own so the bin stays level. Overall suspension movement now sits at **200mm either way, 400mm total**. Having hydraulic suspension is a much smoother ride with less stress on soil and your tractor hitch and allows you to **lower the height** of your bin for transport. Simply remove oil from the loop via your tractor and the bin height comes down up to 200mm max. Control the suspension height and drawbar height via the remote control supplied.

## Adjustable cushioned drawbar

Our cushioned drawbar now sits flatter and **level with the ground**, reducing pressure on your tractor hitch and **levelling out your PTO** at a flatter angle. The cushion effect is now via two hydraulic rams rather than the poly blocks previously used. The rams give a **more reactive cushion** with **larger range**, reducing pressure on the drawbar and increasing ride quality. The drawbar height is easily adjustable to suit your specific tractor. An **external remote** on a lead controls your hydraulic jackstand so just one person is needed to hook up the bin to the tractor.



Suspension, jackstand and drawbar remote



Hydraulic Suspension



Suspension levelling locators

# Your Controls in One Place

Our mounted in cab joystick makes bin unload a one man job

## Adjustable Poly Spout & Lights/Cameras/Beacons

Our adjustable poly spout is controlled from your cab using our multifunctional joystick. Lights/cameras and beacons are also switched on and off from your cab.

## Auger Unfold/Pivot

The auger unfold and auger pivot are hydraulically controlled from your cab eliminating the need to exit the machine.

## Electronic Grain Flow Doors

Our internal full length grain flow doors are electronically opened and closed from your cab for total grain flow control.

## Sweep Auger

On full PTO drive the electronic clutch is turned on and off via the joystick controls. When setup with a HYD/PTO or full HYD setup, our sweep auger is controlled from the cab and can be sped up or slowed down based on the hydraulic flow.

On full PTO setup the sweep auger controls the floor auger on and off!

Multifunctional Joystick and supplied viewing screen



Multifunctional control box



## Full Hydro

Full Hydro is your go to if your tractor does not have PTO or if you would like greater control over filling your seeding carts.

Max unload speed will decrease with a Full Hydro setup!




Adjustable poly spout



Feature locations

# Personalise Your Nyrex

Choose from a broad range of options to create your perfect Chaser Bin

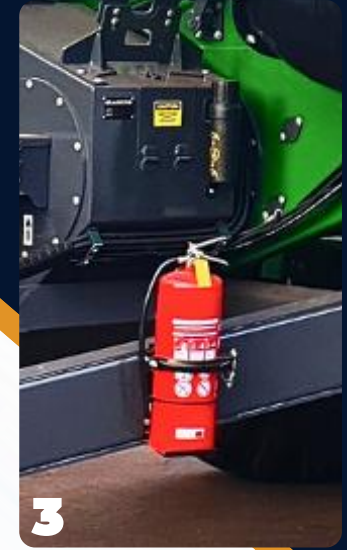

## Our Options

1. Scales Paired With Libra Cart Control
2. Track Options
3. Fire Extinguisher - 9L with Brackets
4. Float Tyre Upgrade
5. Stubble Mats

# Personalise Your Nyrex

Choose from a broad range of options to create your perfect Chaser Bin



## Our Options (Extended)

- 6. Fixed Poly Dropchute or Hydraulic Poly Dropchute Option. Left or Right Hand Discharge Auger.
- 7. Full PTO/PTO, PTO/HYD or Full Hydro/Hydro Option
- 8. Electronic On/Off Clutch for PTO Floor Auger
- 9. Fire Fighter - 2 x 400L (Petrol or Hydraulic)
- 10. Seeding Chute For Nyrex Chaser Bin
- 11. Tramliner (Auger Driven)
- 12. Tow Hitch
- 13. Custom Wheel Centres - 4m etc.

# A Range of Models to Suit Your Farming Operation

Choose Your Model



| Volume | Axle Type   | Tonnage | Minimum HP |
|--------|-------------|---------|------------|
|        |             |         | Required   |
| 23,000 | Single Axle | 18T SGL | 180HP      |
| 32,000 | Single Axle | 25T SGL | 200HP      |
| 40,000 | Single Axle | 30T SGL | 225HP      |
| 40,000 | Tandem Axle | 30T TDM | 235HP      |
| 48,000 | Tandem Axle | 38T TDM | 270HP      |
| 56,000 | Tandem Axle | 45T TDM | 320HP      |
| 70,000 | Tandem Axle | 55T TDM | 380HP      |
| 70,000 | Tri Axle    | 55T TRI | 400HP      |
| 82,000 | Tri Axle    | 65T TRI | 470HP      |
| 94,000 | Tri Axle    | 75T TRI | 600HP      |

# Quality Product Service and Delivery

We service and deliver the best Chaser  
Bin all over Australia

## 5 year structural warranty

GrainKing's 5 year structural warranty provides peace of mind that your bin will stand the test of time through all farming conditions. If your bin experiences a manufacturing structural defect you can be assured we will be there to assist you with repair or replacement.

## Australia Wide

GrainKing has the ability to transport your new chaser bin to any corner of Australia. With offices in QLD and WA our service and sales team are there to support you. All manufacturing is completed in WA. GrainKing's Dealers are spread far and wide over Australia.

## Our Offices

**QLD** 40 SOWDEN ST, DRAYTON,  
TOOWOOMBA QLD 4350

**WA** 22 WITTENBERG DR, CANNING VALE  
WA 6155,  
7 WEST MAIN ST, CUNDERDIN WA 6407  
HOURS: MON - FRI 8AM - 4:30PM  
70 BANNISTER RD, CANNING VALE  
WA 6155

PHONE: 1300 472 465

EMAIL: SALES@GRAINKING.COM.AU

Our 5 year warranty covers structural defects and does not cover parts and outsourced items!



## Notes

---

---

---

---

---

---

---

---

---

---

# Discover More at GrainKing.com.au

## Product Specs

| SPECIFICATION                | 23,000                          | 32,000                        | 40,000                        | 40,000                          | 48,000                          | 56,000                        | 70,000                        | 70,000                        | 82,000                        | 94,000                        |
|------------------------------|---------------------------------|-------------------------------|-------------------------------|---------------------------------|---------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| RATED TONNAGE RANGE          | 18T SGL                         | 25T SGL                       | 30T SGL                       | 30T TDM                         | 38T TDM                         | 45T TDM                       | 55T TDM                       | 55T TRI                       | 65T TRI                       | 75T TRI                       |
| MODEL NUMBER                 | 23,000                          | 32,000                        | 40,000                        | 40,000                          | 48,000                          | 56,000                        | 70,000                        | 70,000                        | 82,000                        | 94,000                        |
| NEW TANK WIDTH               | 3.5m                            | 3.5m                          | 3.5m                          | 3.5m                            | 3.5m                            | 4.5m                          | 4.5m                          | 4.5m                          | 4.5m                          | 4.5m                          |
| NEW WIDTH INC TYRES          | 3.8m                            | 3.8m                          | 3.8m                          | 3.8m                            | 3.8m                            | 4.5m                          | 4.5m                          | 4.5m                          | 4.5m                          | 4.5m                          |
| NEW LOAD IN HEIGHT           | 3.53m                           | 3.53m                         | 3.53m                         | 3.53m                           | 3.53m                           | 3.63m                         | 3.63m                         | 3.63m                         | 3.63m                         | 3.63m                         |
| NEW LOW SIDE HEIGHT          | 3.45m                           | 3.45m                         | 3.45m                         | 3.45m                           | 3.45m                           | 3.55m                         | 3.55m                         | 3.55m                         | 3.55m                         | 3.55m                         |
| NEW BIN LENGTH               | 3.85m                           | 5.25m                         | 5.62m                         | 5.62m                           | 7.02m                           | 6.64m                         | 8.04m                         | 8.04m                         | 9.45m                         | 10.84m                        |
| LENGTH INCLUDING DRAWBAR     | 6.35m                           | 7.75m                         | 8.12m                         | 8.12m                           | 9.52m                           | 9.14m                         | 10.54m                        | 10.54m                        | 11.95m                        | 13.34m                        |
| AXLE TYPE                    | Single                          | Single                        | Single                        | Tandem                          | Tandem                          | Tandem                        | Tandem                        | Tri                           | Tri                           | Tri                           |
| TYRES                        | 30.5 L - 32 LUG FLOTATION TYRES | 800/65-32 LUG FLOTATION TYRES | 900/65-32 LUG FLOTATION TYRES | 30.5 L - 32 LUG FLOTATION TYRES | 30.5 L - 32 LUG FLOTATION TYRES | 900/65-32 LUG FLOTATION TYRES | 900/65-32 LUG FLOTATION TYRES | 900/65-32 LUG FLOTATION TYRES | 900/65-32 LUG FLOTATION TYRES | 900/65-32 LUG FLOTATION TYRES |
| BRAKES                       | Yes                             | Yes                           | Yes                           | Yes                             | Yes                             | Yes                           | Yes                           | Yes                           | Yes                           | Yes                           |
| STEERING AXLES               | No                              | No                            | No                            | Rear                            | Rear                            | Rear                          | Rear                          | Front/Rear                    | Front/Rear                    | Front/Rear                    |
| SUSPENSION                   | No                              | No                            | No                            | Yes                             | Yes                             | Yes                           | Yes                           | Yes                           | Yes                           | Yes                           |
| DISCHARGE AUGER SIZE         | 22"                             | 22"                           | 22"                           | 22"                             | 22"                             | 24"                           | 24"                           | 24"                           | 24"                           | 24"                           |
| DISCHARGE RATE (TONNE P/MIN) | Up to 16T PTO/HYD Drive         | Up to 16T PTO/HYD Drive       | Up to 16T PTO/HYD Drive       | Up to 16T PTO/HYD Drive         | Up to 16T PTO/HYD Drive         | Up to 16T PTO/HYD Drive       | Up to 16T PTO/HYD Drive       | Up to 16T PTO/HYD Drive       | Up to 16T PTO/HYD Drive       | Up to 16T PTO/HYD Drive       |
| DISCHARGE AUGER SIDE         | Optional                        | Optional                      | Optional                      | Optional                        | Optional                        | Optional                      | Optional                      | Optional                      | Optional                      | Optional                      |
| DISCHARGE HEIGHT             | 5.6m                            | 5.6m                          | 5.6m                          | 5.6m                            | 5.6m                            | 5.6m                          | 5.6m                          | 5.6m                          | 5.6m                          | 5.6m                          |
| ADJUSTABLE SPOUT             | Yes                             | Yes                           | Yes                           | Yes                             | Yes                             | Yes                           | Yes                           | Yes                           | Yes                           | Yes                           |
| LIGHT KIT                    | Yes                             | Yes                           | Yes                           | Yes                             | Yes                             | Yes                           | Yes                           | Yes                           | Yes                           | Yes                           |
| CAMERA KIT                   | Yes                             | Yes                           | Yes                           | Yes                             | Yes                             | Yes                           | Yes                           | Yes                           | Yes                           | Yes                           |
| ADJUSTABLE GRAIN FLOW DOORS  | Yes                             | Yes                           | Yes                           | Yes                             | Yes                             | Yes                           | Yes                           | Yes                           | Yes                           | Yes                           |
| FULL LENGTH CLEAN OUT DOORS  | Yes                             | Yes                           | Yes                           | Yes                             | Yes                             | Yes                           | Yes                           | Yes                           | Yes                           | Yes                           |
| ROLL TARP                    | Yes                             | Yes                           | Yes                           | Yes                             | Yes                             | Yes                           | Yes                           | Yes                           | Yes                           | Yes                           |
| SIDE INSPECTION DOOR         | Yes                             | Yes                           | Yes                           | Yes                             | Yes                             | Yes                           | Yes                           | Yes                           | Yes                           | Yes                           |
| COLOUR                       | Green, Red, Blue,Grey           | Green, Red, Blue,Grey         | Green, Red, Blue,Grey         | Green, Red, Blue,Grey           | Green, Red, Blue,Grey           | Green, Red, Blue,Grey         | Green, Red, Blue,Grey         | Green, Red, Blue,Grey         | Green, Red, Blue,Grey         | Green, Red, Blue,Grey         |
| WARRANTY                     | 5 YR Structural                 | 5 YR Structural               | 5 YR Structural               | 5 YR Structural                 | 5 YR Structural                 | 5 YR Structural               | 5 YR Structural               | 5 YR Structural               | 5 YR Structural               | 5 YR Structural               |



# Notes

[illegible]

# GRAINKING



CONNECT WITH US



<https://www.youtube.com/@grainkingbins>

[GrainKing.com.au](http://GrainKing.com.au)



SCAN HERE!

## DISCLAIMER

GrainKing reserves the right to make changes in engineering or specifications at any time without notice. Although every effort has been made to display accurate information, no responsibility will be taken for any errors contained in this publication.